


BPW AXLES WITH REVERSING MECHANISM FOR OVERRUN HITCHES.

BPW axles with reversing mechanism are notable for their good braking performance and together with matching BPW overrun hitches they form a perfect combination for your vehicle.

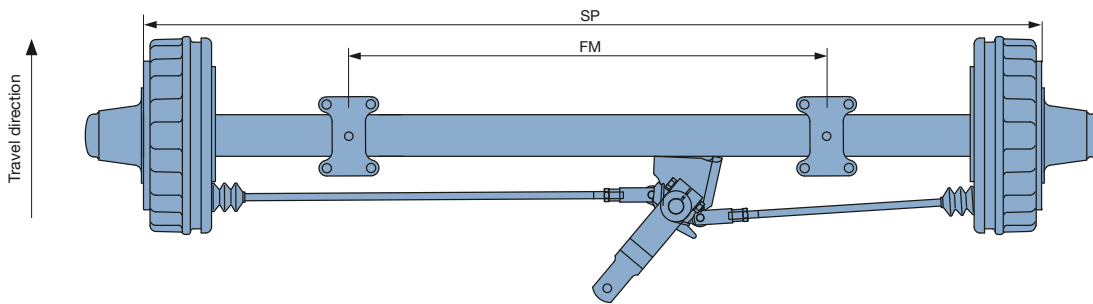

Axle cross section (mm)	Track width SP (mm)	Spring centre FM (mm)	Brake equalisation device	Static axle load (kg)						BPW code number
				25 km/h			40 km/h			
				○	○ ○	○ ○	○	○ ○	○ ○	

GS 4006 - axle load up to 4,500 kg (25 km/h)

Wedge-type brake S3006-7 RAZG - 300 x 60 mm - wheel connection 160/205/6 ET 0 - M18 x 1.5

60	1,360	860	MV	4,500	3,800	-	4,100	3,500	-	55.56.381.600
60	1,360	860	150 LV	4,500	3,800	-	4,100	3,500	-	55.56.381.601
60	1,360	860	150 RV	4,500	3,800	-	4,100	3,500	-	55.56.381.602
60	1,500	1,000	MV	4,500	3,800	-	4,100	3,500	-	55.56.381.603
60	1,500	1,000	200 LV	4,500	3,800	-	4,100	3,500	-	55.56.381.604
60	1,500	1,000	200 RV	4,500	3,800	-	4,100	3,500	-	55.56.381.605
60	1,600	1,100	MV	4,500	3,800	-	4,100	3,500	-	55.56.381.606
60	1,600	1,100	200 LV	4,500	3,800	-	4,100	3,500	-	55.56.381.607
60	1,600	1,100	200 RV	4,500	3,800	-	4,100	3,500	-	55.56.381.608

GS 4006 - axle load up to 4,500 kg (25 km/h)

Wedge-type brake S3008 RA - 300 x 80 mm - wheel connection 160/205/6 ET 0 - M18 x 1.5

60	1,500	1,000	MV	4,500	3,800	-	4,100	3,500	-	55.56.356.600
----	-------	-------	----	-------	-------	---	-------	-------	---	---------------

Standard offset: ET 0 mm.

Spring seats possible on request.

Brake equalisation device either at the front in the centre, at the front 250 mm to the left or at the front 250 mm to the right, as required.



UP TO 8 t
AXLE LOAD

Axle cross section (mm)	Track width SP (mm)	Spring centre FM (mm)	Brake equalisation device	Static axle load (kg)						BPW code number
				25 km/h			40 km/h			
				□	□	□	□	□	□	

GS 5506 - axle load up to 5,500 kg (25 km/h)										
Wedge-type brake S 3006-7 RAZG - 300 x 60 mm - wheel connection 160/205/6 ET 0 - M18 x 1.5										
70	1,500	1,000	MV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.381.600
70	1,500	1,000	200 LV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.381.601
70	1,500	1,000	200 RV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.381.602
70	1,700	1,200	MV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.381.603
70	1,700	1,200	250 LV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.381.604
70	1,700	1,200	250 RV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.381.605
70	1,800	1,300	MV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.381.606
70	1,800	1,300	250 LV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.381.607
70	1,800	1,300	250 RV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.381.608
70	2,000	1,500	MV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.381.609

GS 5506 - axle load up to 5,500 kg (25 km/h)										
Wedge-type brake S3008 RA - 300 x 80 mm - wheel connection 160/205/6 ET 0 - M18 x 1.5										
70	1,500	1,000	MV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.356.600
70	1,500	1,000	200 LV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.356.601
70	1,500	1,000	200 RV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.356.602
70	1,700	1,200	MV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.356.603
70	1,700	1,200	250 LV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.356.604
70	1,700	1,200	250 RV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.356.605
70	1,800	1,300	MV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.356.606
70	1,800	1,300	250 LV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.356.607
70	1,800	1,300	250 RV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.356.608
70	2,000	1,500	MV	7,000	6,000	5,500	6,500	5,500	5,000	55.63.356.609

GS 7008 - axle load up to 7,000 kg (25 km/h)										
Wedge type brake S3008 RA - 300 x 80 mm - wheel connection 220/275/8 ET 0 - M20 x 1.5										
80	1,800	1,300	MV	8,000	7,500	7,000	8,000	7,000	6,500	55.67.356.606
80	1,800	1,300	250 LV	8,000	7,500	7,000	8,000	7,000	6,500	55.67.356.607
80	1,800	1,300	250 RV	8,000	7,500	7,000	8,000	7,000	6,500	55.67.356.608
80	2,050	1,500	MV	8,000	7,500	7,000	8,000	7,000	6,500	55.67.356.609
80	2,050	1,500	250 LV	8,000	7,500	7,000	8,000	7,000	6,500	55.67.356.610
80	2,050	1,500	250 RV	8,000	7,500	7,000	8,000	7,000	6,500	55.67.356.611

GS 8008 - axle load up to 8,000 kg (25 km/h)										
Wedge type brake S3008 RA - 300 x 80 mm - wheel connection 220/275/8 ET 0 - M20 x 1.5										
90	1,800	1,300	MV	8,000	8,000	8,000	8,000	8,000	8,000	55.70.356.600
90	1,800	1,300	250 LV	8,000	8,000	8,000	8,000	8,000	8,000	55.70.356.601
90	1,800	1,300	250 RV	8,000	8,000	8,000	8,000	8,000	8,000	55.70.356.602
90	2,050	1,500	MV	8,000	8,000	8,000	8,000	8,000	8,000	55.70.356.603
90	2,050	1,500	250 LV	8,000	8,000	8,000	8,000	8,000	8,000	55.70.356.604
90	2,050	1,500	250 RV	8,000	8,000	8,000	8,000	8,000	8,000	55.70.356.605

In certain technical conditions axle can be provided with cable tubes (RASK) instead of brake linkage (RAZG).